
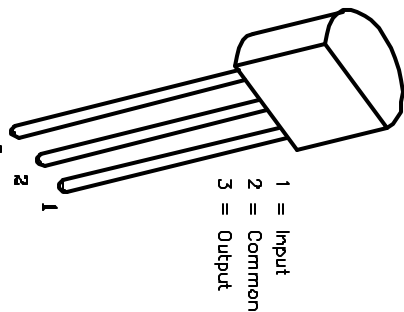
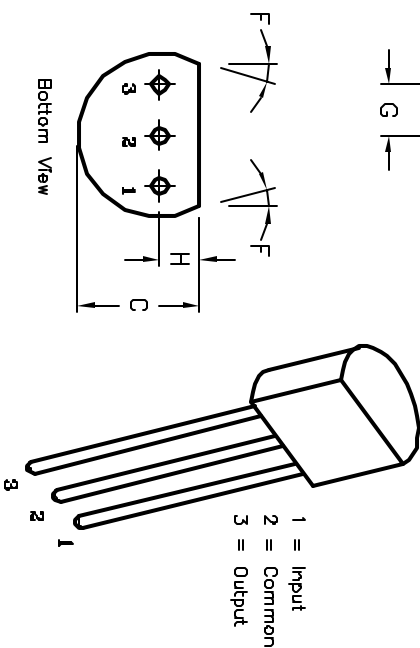



REVISIONS

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
1820	A	RELEASED	HO	3/17/05	J	04/04/08	JN	04/04/08

TO-92

DIM.	MIN.	MAX.
A	4.32	5.33
B	4.45	5.20
C	3.18	4.19
D	0.41	0.55
E	0.35	0.50
F	S ¹	
G	1.14	1.40
H	1.14	1.53
K	12.70	-

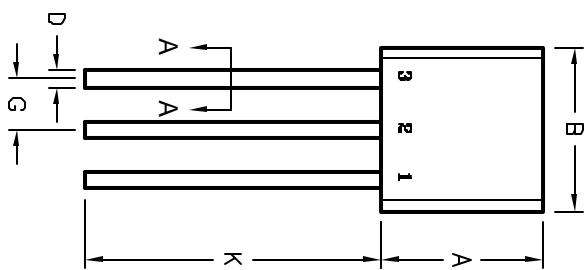

Description: The 78L18 is a positive 3-terminal voltage regulator in a TO-92 type package suitable for numerous applications requiring up to 100mA. This device features thermal shutdown and current limiting making the part remarkably rugged. In most applications, no external components are required for operation. The 78L18 is useful for on-card regulation or any other application where a regulated positive voltage at a modest current level is needed. This device offers a substantial advantage over the common resistor/Zener diode approach.

Features:

- No External Components Required
- Internal Short-Circuit Current Limiting
- Internal Thermal Overload Protection

Absolute Maximum Ratings:

- Input Voltage, $V_{in} = 35V$
- Internal Power Dissipation (Note 1), $P_D =$ Internally Limited
- Operating Junction Temperature Range, $T_{jop} = 0^\circ C$ to $+70^\circ C$
- Maximum Junction Temperature, $T_J = +125^\circ C$
- Storage Temperature Range, $T_{stg} = -55^\circ C$ to $+150^\circ C$
- Lead Temperature (During Soldering, 10sec.), $T_L = +300^\circ C$

Electrical Characteristics: ($0^\circ TO +125^\circ C$, $V_{out}=18V$, $V_{in}= 27V$, $I_D=40mA$, $C_{in}=0.33\mu F$, $C_{out}=0.1\mu F$, Note 2, unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Units
Output Voltage	V_O	$T_J = +25^\circ C$	17.3	18	18.7	V
Line Regulation	Reg_{line}	$1mA \ O \ I_D \ O \ 100mA$, $20.7V \ O \ V_{in} \ O \ 33V$	-	-	18.9	V
Load Regulation	Reg_{load}	$T_J = +25^\circ C$, $20.7V \ O \ V_{in} \ O \ 33V$	-	-	325	mV
Quiescent Current	I_Q	$T_J = +25^\circ C$, $1mA \ O \ I_D \ O \ 100mA$	-	-	170	mV
Quiescent Current Change	I_Q	$T_J = +125^\circ C$	-	2	6	mA
Output Noise Voltage	V_n	With load, $21V \ O \ V_{in} \ O \ 33V$	-	-	1.5	mA
Ripple Rejection	RR	$T_J = +25^\circ C$, $f = 10Hz$ to $10kHz$	-	-	0.1	mA
Drop Out Voltage	V_{DO}	$23V \ O \ V_{in} \ O \ 33V$, $f = 120Hz$	-	-	150	μV
		$T_J = +25^\circ C$, $I_D = 40mA$	-	1.7	-	dB

Notes:

- 1- Thermal resistance, junction-to-ambient is $+180^\circ C/W$ when mounted with 0.40 inch leads on a P.C. board, and $+160^\circ C/W$ when mounted with 0.25 inch leads on a P.C. board.
- 2- To ensure constant junction temperature, low duty cycle pulse testing is used.

TOLERANCES:

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DISCLAIMER:

ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

DRAWING TITLE:

Voltage Regulator, Bipolar, Plastic, TO-92, Positive

DRAWN BY:	DATE:	SIZE	DWG. NO.	ELECTRONIC FILE	REV
HISHAM ODISH	3/17/05	A	78L18	35C0952.DWG	A
CHECKED BY:	DATE:	SCALE:	NTS	U.O.M.: MILLIMETERS	SHEET: 1 OF 1
Jason Nash	04/04/08				
APPROVED BY:	DATE:				
Jason Nash	04/04/08				