


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVISIONS			DOC. NO. SPC-F005 * Effective: 12/21/98 * DCP No: 680					
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
1292	A	RELEASED	JWM	1/30/02	HO	1/30/02	DJC	1/30/02

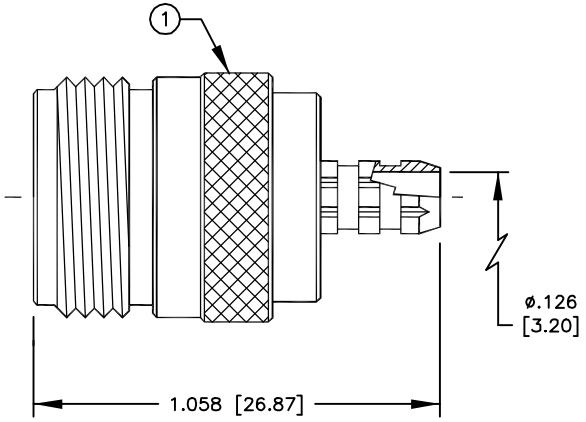


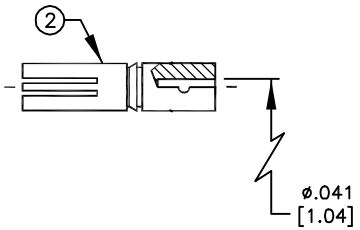

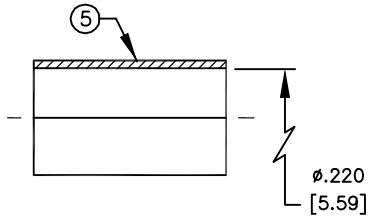

SPECIFICATIONS:

IMPEDANCE: 50 OHMS
WORKING VOLTAGE: 1000 VRMS @ SEA LEVEL
FREQUENCY RANGE: 0–11 GHz
INSERTION LOSS: ≤ –.2 dB @ 10 GHz
VSWR MAX: 1.3:1 @ 9 GHz
FOR RG–58, 58A, 58C, 141, 141A, 400/U, BELDEN 8240, 8259, 8262, 9201, 9203, 9310, 9311, COMM/SCOPE 0268 & CUSHCRAFT ULTRALINK TL92463E

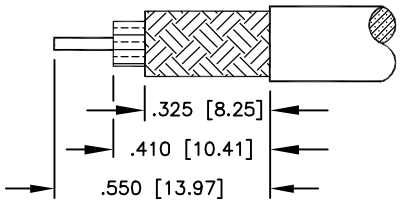

SUGGESTED STRIPPING INSTRUCTIONS
SUGGESTED CRIMP DIES: .100 & .213

5	FERRULE	1	BRASS	SILVER
4	PRESS–FIT GROUND RING	1	BRASS	SILVER
3	DIELECTRIC	1	TEFLON®	NONE
2	CONTACT	1	BRASS	GOLD
1	BODY	1	BRASS	SILVER

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:
Jeff McVicker	1/30/02
CHECKED BY:	DATE:
Hisham Odish	1/30/02
APPROVED BY:	DATE:
Daniel Carey	1/30/02

SPC TECHNOLOGY

DRAWING TITLE: N Female Crimp Connector

SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	SPC4346	84N1270.dwg	A

SCALE: NTS | U.O.M.: INCHES [mm] | SHEET: 1 OF 1

SPC-F005.DWG