




ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART, CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F003.DWG

REVISIONS

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECK'D	DATE	APPR'D	DATE
1934	A	Released	JIN	07/28/08	JWM	07/28/08	JWM	07/28/08

DOC. NO. SPC-F003 * Effective 7/8/02 * DCP No. 1308

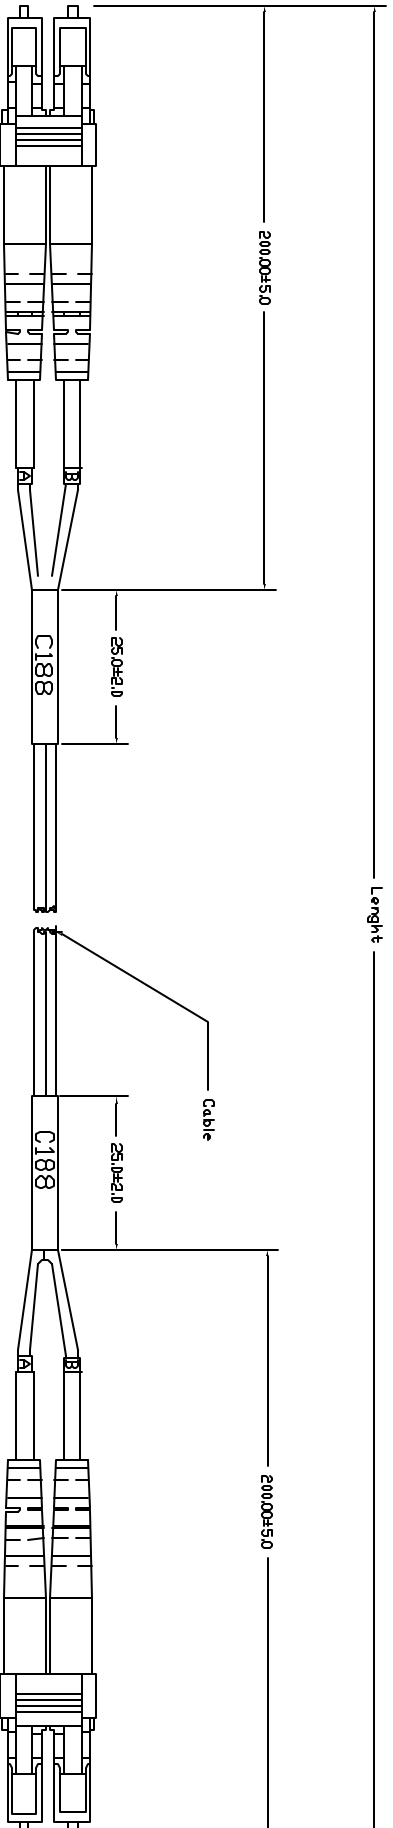

Notes:

1. New product shall be reference to Ballcore GR-326 standard.
2. Insertion loss: <=0.2dB typical (1300nm).
3. Cable Marking:
 - Baycon Plus Corning DM3-50/125 optical fiber cable DFNR E201648 06/2006 *****M
 - Plus Corning DM3-50/125 optical fiber cable DFNR E241104 06/2006 *****M

SPC Type No.	Length (Meters)
SPC23085	1
SPC23086	2
SPC23087	3
SPC23088	4
SPC23089	5
SPC23090	8
SPC23091	10

DISCLAIMER: ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES: UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:
Jason Nash	07/28/08
CHECKED BY:	DATE:
JWM	07/28/08
APPROVED BY:	DATE:
JWM	07/28/08

DRAWING TITLE: 50 micron, multi mode, 3mm jacket, LC-LC

SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	Ta-895	Ta-895.DWG	A

SCALE:	U.O.M.: INCHES [mm]	SHEET:	1 OF 1
NTS			