
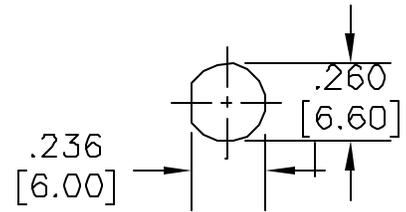


All rights Reserved . No Portion of this publication, whether in whole or in part can be reproduced without the express written consent of SPC Technology.

Revisions:			DOC. No.	* Effective: 12/21/98		* DCP No. 680		
DCP: #	REV	Description:	Drawn	Date	Checked	Date	Approved	Date
XXX	A	RELEASED	Amudha	27-11-08	Suresh	27-11-08	JN	12/12/08

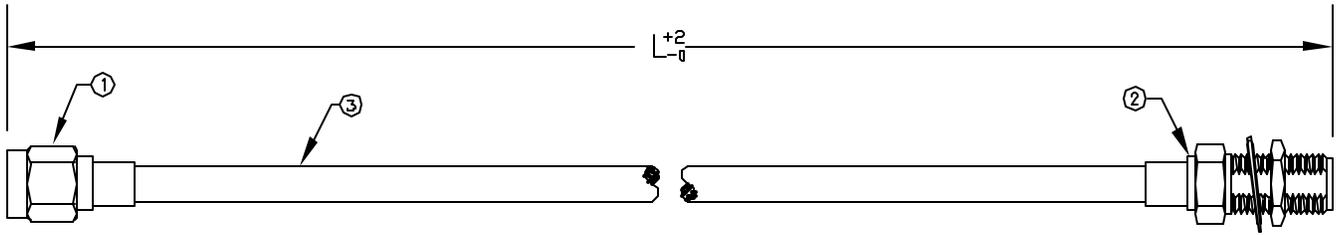

ITEM	DESCRIPTION	MATERIAL	FINISH
3	CABLE	-	-
2	SMA F S/R BULK	BRASS	NICKEL
1	SMA M SEMI RIGID	BRASS	NICKEL

SUGGESTED MOUNTING CONFIGURATION

Manufacturer Part Number	Length	Cable Type	Strain Relief
SPC25920	12	RG-402/U	No
SPC25921	24	RG-402/U	No
SPC25922	36	RG-402/U	No
SPC25923	48	RG-402/U	No
SPC25924	60	RG-402/U	No
SPC25925	72	RG-402/U	No
SPC25926	12	SR402FL	No
SPC25927	24	SR402FL	No
SPC25928	36	SR402FL	No
SPC25929	48	SR402FL	No
SPC25930	60	SR402FL	No
SPC25931	72	SR402FL	No

Disclaimer:

All statements and technical information contained herein are based upon information and/or tests we believe to be accurate and reliable. Since conditions of use are beyond our control, the user shall determine the suitability of the product for the intended use and assume all risk and liability whatsoever in connection therewith.



SPC TECHNOLOGY

Drawing Title:

**SMA MALE SEMI RIGID TO
SMA FEMALE SEMI RIGID BULKHEAD**

Unless otherwise specified, Dimensions are for references purposes only.

Drawn By:	Date:
Amudha	27-11-08
Checked By:	Date:
Suresh	27-11-08
Approved By:	Date:
Jason Nash	12/12/08

Size: A	Dwg. No TA-1032	Electronic File TA-1032.dwg	Rev A
Scale: NTS	U.O.M.: Inches (mm)	Sheet: 1 of 1	