


7A Point of Load Converter

RoHS

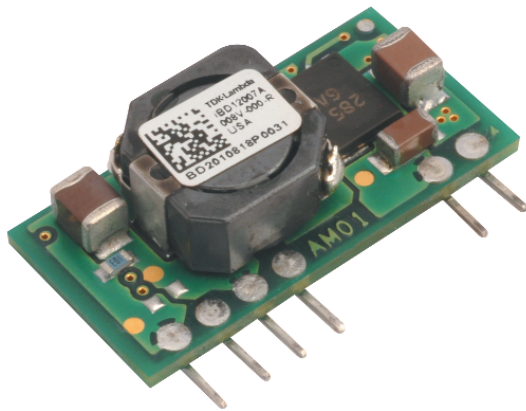

- ◆ Standard SIP Footprint
- ◆ 6.0-14VDC Input
- ◆ 0.8 - 5.5V Outputs
- ◆ Through Hole Mounting
- ◆ Low 12.7mm Profile
- ◆ Non Isolated Output

Features and Benefits

Feature	Benefit
◆ High operating efficiency (up to 92%)	◆ Reduced system heating
◆ Constant 240kHz switching frequency	◆ Easier system filtering
◆ Starts with pre-biased output	◆ Supports complex digital systems

Specifications


MODEL		iBD
ITEMS		
Nominal Output Voltage	VDC	0.8 - 5.5V
Input Voltage Range	VDC	6 - 14V
Input Current (max)	A	7A
Output Voltage Tolerance	%	±3.5%
Ripple & Noise (max) (pk - pk)	mV	125
Line Regulation (max)	%	0.2%
Load Regulation (typical)	mV	20
Overload Protection	A	Inception- 11.5A; Short circuit - auto recovery
Overvoltage Protection	-	N/A
Remote Sense	-	Yes
Remote On / Off	-	Positive Logic standard. Negative logic available, see detailed datasheet
Sequencing	-	Yes
Temperature (operating)	°C	-40 to 105 (See detailed datasheet for derating)
Temperature (storage)	°C	-55 to 125
Humidity (operating)	-	20-95% RH Non condensing
Humidity (storage)	-	10-95% RH Non condensing
Cooling	-	Convection or forced air (See detailed datasheet for derating)
Isolation Voltage	-	None
Vibration (non operating)	-	5 to 50Hz@0.5g(4.9m/s ²), & 50 to 500Hz@1.5g(14.7m/s ²) per Bellcore TR-EOP-000063-5.4.4
Shock	-	196.1m/s ²
Safety Agency Certifications	-	Pending - UL60950 (US and Canada), VDE0805 (IEC60950), CB scheme (IEC60950)
Weight (max)	g	6
Size (LxWxH)	mm	25.4 x 8.51 x 12.7
Warranty	yrs	3 Years

Note: See website for detailed specifications and test methods

Model Selector

Model	Output Voltage	Output Adjust	Output Curr. (A)	Max. Output Power (W)	Efficiency at Full Load (%)
iBD12007A008V-000-R	0.80 - 5.5	0.80 - 5.5	7	35	92% at 5V

Outline Drawing

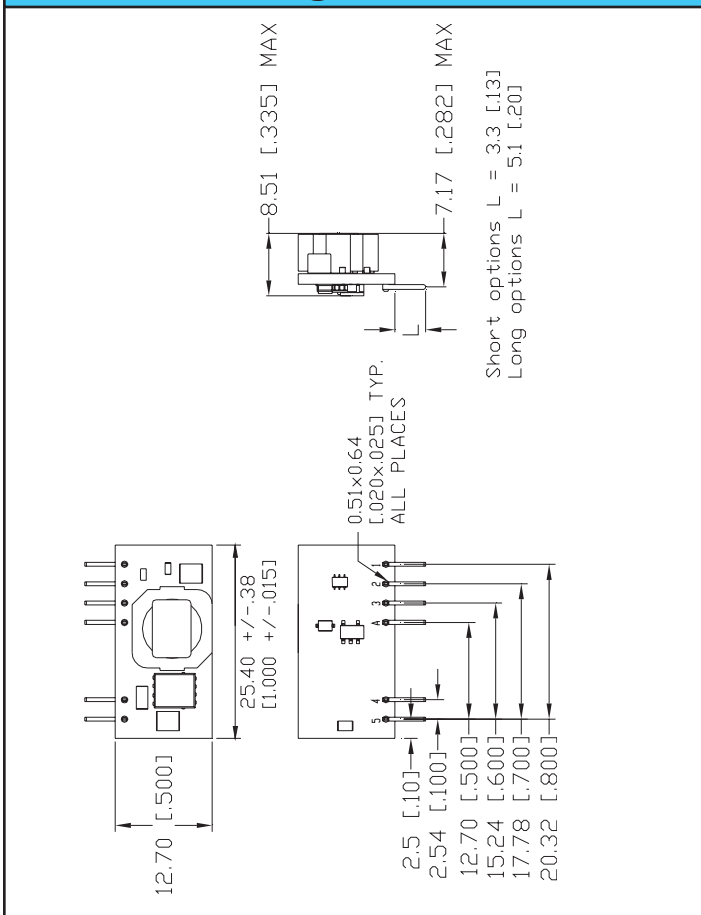

Pinout

PIN	Function
1	Vout
2	Trim
3	GND
A	Sequencing
4	Vin
5	On / Off

For Additional Information, please visit us.tdk-lambda.com/lp/products/iba-series.htm

Other Lambda DC-DC Products

CC-E	1.5-12W, 1 to 2 Outputs, 5 to 48VDC Input
PX	10-40W, 1 to 3 Outputs, 12 to 48VDC Input
iPB	15-35W, 1.5-5V Output, 36-75VDC Input, Pico Brick
iS	Sixteenth Bricks DC-DC
iE	Eighth Brick DC-DC
iQ	Quarter Brick DC-DC
PAH	Half Brick DC-DC
PAF	Full Brick DC-DC
FPS	1kW to 3kW, 12 to 48V Output, AC-DC Front Ends
PFE	AC-DC Power Module
iA, iB	Non Isolated DC-DC Converters