

WG series

MP3 Support Voice Annunciator with LED Alarm




WG series

The WG series is wall mountable and will easily blend into any environment such as hospitals, airports and office buildings, providing audible messages and visual signal with LED.

- * Colors available: red, yellow, green, blue and clear/white.
- * Alert operations or the public with voice messages or chimes or any other sound with flashing LED light.
- * Effective for audible/visual guidance at public facilities such as train platforms, bathrooms, etc.
- * Record your own messages using PATLITE's Playlist Editor, and MP3 sound files or use PATLITE'S custom recording service.
- * 3 message channels for various applications. One channel has priority for emergency/security purposes.
- * Has 3 messages for a total of 32 seconds.
- * NPN open collector transistor compatible.
- * 90-250V AC type is also available.

Dimensions

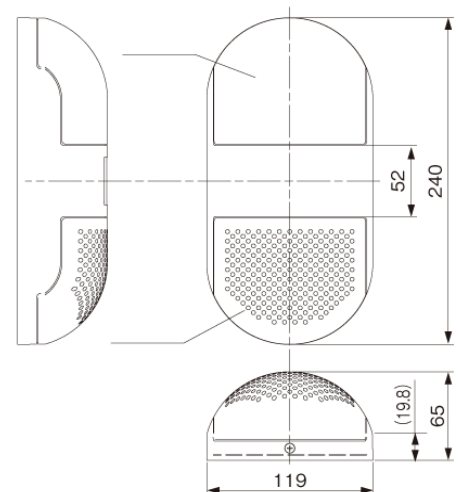

PATLITE (U.S.A.) Corporation

<http://www.patlite.com>

20130 S. Western Ave., Torrance, CA 90501, U.S.A.

email: sales@patlite.com

Tel: +1-310-328-3222 Fax: +1-310-328-2676

RFV series

MP3 Support Voice Annunciator with LED Beacon



100mm diameter	95dB (at 1m)
IP54	MP3
4 channel	64 seconds



Message or setting can be changed from side cover even after installation.


RFV series

The RFV series is a combination LED rotating beacon with 4 channels, MP3 programmable, sound unit.

- * Colors available: red and yellow
- * Reduce maintenance and increase reliability with PATLITE's long life LEDs that last over 5 years with 24/7 continuous operation.
- * Special Gear Drive Motor increases reliability because it will still operate even after 10 years of no operation.
- * Message is field programmable with SD card, and message capacity is up to 64 seconds (64kbit/s) with 4 channels.
- * Record your own messages using PATLITE's Playlist Editor,
- * Volume is adjustable from 0 to 95dB at 1m.

Model	Rated Voltage	Operating Voltage Range	Power Consumption	Flashes per Minute	Playback Channel	Mass
RFV-24F	24V DC	25V DC \pm 10%	Max. 18W	115 \pm 15 fpm	4/bit input	1.0kg
RFV-100F	100V AC	100V AC \pm 10%	Max. 18W		15/binary input	1.2kg
RFV-120F	120V AC	120V AC \pm 10%				
RFV-220F	220V AC	220V AC \pm 10%				

Dimensions

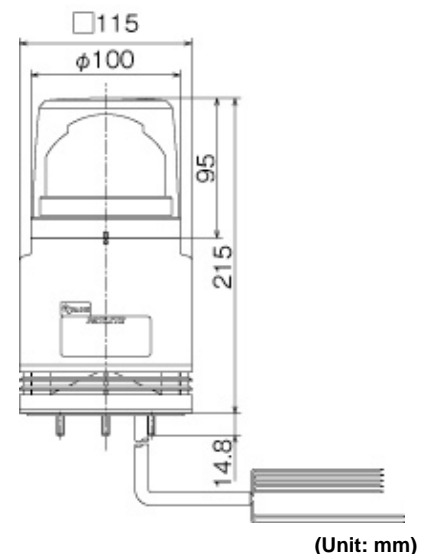

PATLITE (U.S.A.) Corporation

<http://www.patlite.com>

20130 S. Western Ave., Torrance, CA 90501, U.S.A.

email: sales@patlite.com

Tel: +1-310-328-3222 Fax: +1-310-328-2676

LKEH series

MP3 Support Voice Annunciator with LED Stack Tower



100mm diameter	105dB (at 1m)
IP53	MP3 (LKEH-FV)
64 sec. (LKEH-FV)	32 sounds




Message or setting can be changed from the front panel even after installation.

LKEH series

Get the attention you need with PATLITE's Field Programmable LKEH series light tower/audible alarm hybrid units.

- * Colors available: red, yellow, green, blue and clear/white.
- * LKEH-FV: Total 64 second message in 5 channels (1 bit input), 31 channels (binary input).
LKEH-FE: 32 alarm sounds pre-recorded
8 channels (1 bit input) or 32 channels (binary input).
- * See from great distances with our Ultra Bright LEDs and 100mm diameter lens.
- * Volume is adjustable from 0 to 105dB at 1m.
- * Record your own messages using PATLITE's Playlist Editor (LKEH-FV series).

Dimensions

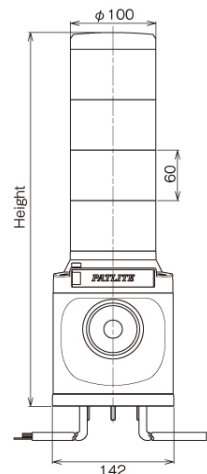

Height (mm)	
1 Light	: 265.2
2 Lights	: 265.3
3 Lights	: 265.4
4 Lights	: 265.5

PATLITE (U.S.A.) Corporation

<http://www.patlite.com>

20130 S. Western Ave., Torrance, CA 90501, U.S.A.

email: sales@patlite.com

Tel: +1-310-328-3222 Fax: +1-310-328-2676

LU7-V1

MP3 Support Voice Annunciator for LU7 series Signal Tower



70mm diameter	80dB (at 1m)	MP3
IP65	32 seconds	4 channels



Stackable Sound Module

- * Available for all LU7 base modules.
- * Easily mounted at the top of the light stack.


LU7-V1

Unique MP3 programmable Sound Module for the LU7 series modular signal tower.

- * Adjust the volume from 0 to 80dB (at 1m, alarm type) to suit various environments.
- * High quality MP3 based sound module replays up to 4 alarms or messages with 32 seconds of total program time.
- * Playback sound selected by the position of internal jumper pin.
- * CE / UL compliant.

Model	Type	Rated Voltage	Power Consumption	Mass
LU7-V1	Voice Annunciator	24V DC	3.5W	0.17kg

Dimensions

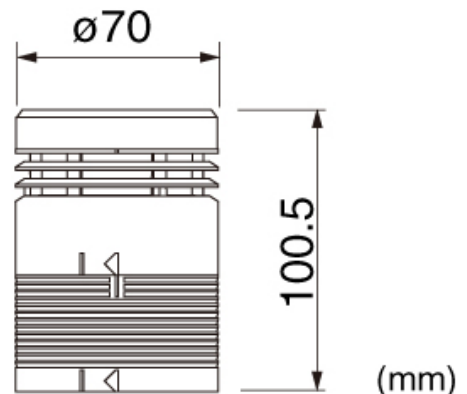

PATLITE (U.S.A.) Corporation

<http://www.patlite.com>

20130 S. Western Ave., Torrance, CA 90501, U.S.A.

email: sales@patlite.com

Tel: +1-310-328-3222 Fax: +1-310-328-2676